

ConMarin Female 7/8"

For: RF-LLX & RF-LLF Hiflex


50Ω

IP 68

Application

Clamp Female-connector for outdoor use. Waterproof according to IP 68.
Fitting the RF-LLX and RF-LLF Hiflex 7/8".

[Assembly instructions.](#)

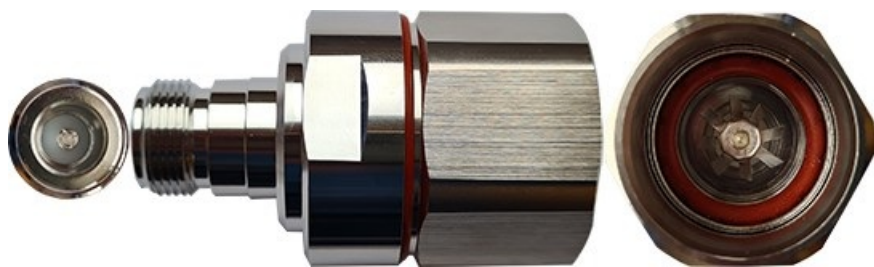

Temperature range	-40 – +85 [°C]
Contact resistance	outer contact: ≤ 0.25 [mΩ] centre contact: ≤ 1.0 [mΩ]
Retention force	≥ 0.56 [N]
Central pin	Brass/Phosphor bronze gold plated
Shell	Brass bar Tri-alloy ≥3μm
Insulator	PTFE
Rubber/waterproof ring	Silicone rubber
Other metal parts	Ni ≥2.5μ
Withstand Voltage	≥ 2000 [V max]
Impedance	50 [Ω]
Frequency range	DC-3 [GHz]
Dielectric resistant	≥ 5000 [MΩ]
VSWR	820MHz – 2635MHz: ≤1.12; 2635MHz – 3000MHz: ≤1.15
Durability	≥ 500 [cycles]
Salt spray	Meet 48 Hours(5% Salt Concentration)
Cables	RF LLX CL leaky 7/8" & RF LLF 7/8" feeder
Prod.no	65427