

## ConMarin N-Female 7/8"

For: RF-LLX & RF-LLF Hiflex

N-K7/8"


50Ω

IP 68

### Bruksområde

Klemme Hun-konnektor for utendørs bruk. Vanntett i henhold til IP 68.  
For montering på RF-LLX og RF-LLF Hiflex.

[Assembly instructions.](#)

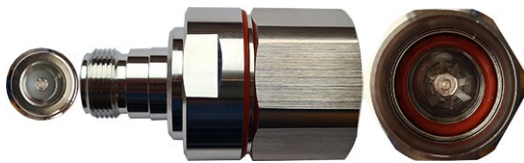

Temperature range	-40 – +85 [°C]
Contact resistance	outer cont. ≤ 0,25 [mΩ] center cont. ≤ 1,0 [mΩ]
Retention force	≥ 0,56 [N]
Central pin	Brass wire HPb59-1 Ag≥3μm
Shell	Brass bar Tri-alloy ≥3μm
Insulator	PTFE
Rubber/waterproof ring	Silicone rubber - IP 67
Other metal parts	Ni ≥2.5μ
Withstand Voltage	≥ 2000 [V max]
Impedance	50 [Ω]
Frequency range	DC-3 [GHz]
Insulation resistant	≥ 5000 [Ω]
VSWR	820 – 2635 MHz: ≤ 12 2635 – 3000 MHz: ≤ 1,15
Durability	≥ 500 [cycles]
Salt spray	48 hours (5% salt concentration)
Cables	RF LLX CL leaky 7/8" & RF LLF 7/8" feeder
Prod.no	65427